

ROOF TILES




An important feature of **LOARA** roof tile which supports its popularity among customers is high embossment. LOARA's structure is symmetric which significantly simplifies its assembly. This modern profile is available both in cut-to-size and in modular option.

LOARA



	roof tile	panel roof tile
effective area	-	0,784 m ²
module length	350 mm	
profile height	23	
fold height	25 mm	30 mm
total width	1187 mm	
effective width	1120 mm	
min. roof slope	9°	15°
coverings	polyester glossy, coarse matt, PURMAT, PURLAK, PURMAX	coarse matt, TOPMAT, PURMAT, PURLAK, PURMAX
accessories	screws, seals, sealing collars, flashings, touch-up paint	

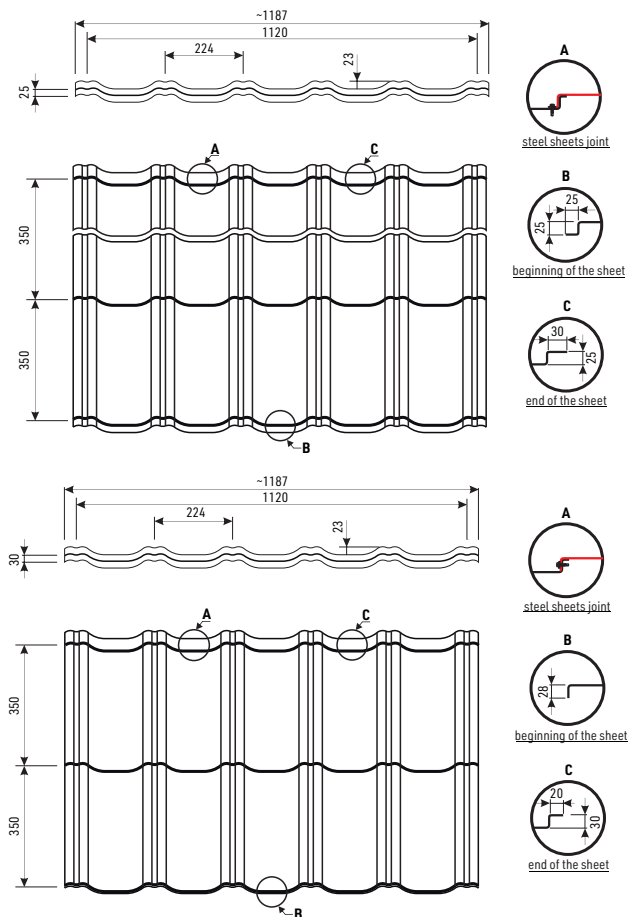


ROOF TILES



REN metal roofing tile with its unique shape allows objects to stand out against others. On the other hand it seamlessly blends into the surrounding environment. It also has a very rich palette of anti-corrosion protection (organic and metallic coatings). Hence, roofs covered with „REN“ tile can be designed for decades without the risk of losing functional properties and aesthetic values.

REN

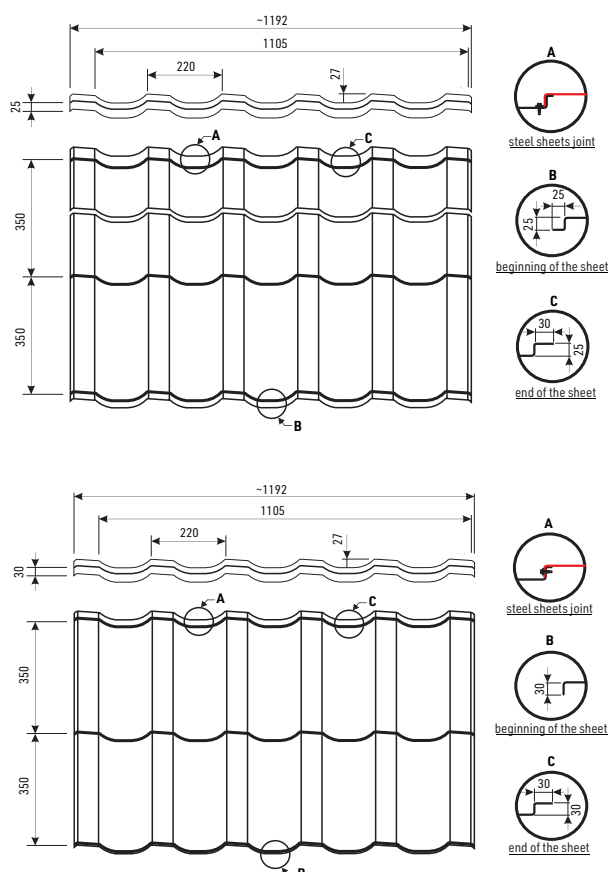

	roof tile	panel roof tile
effective area	-	0,774 m ²
module length		350 mm
profile height		27
fold height	25 mm	30 mm
total width		1192 mm
effective width		1105 mm
min. roof slope	9°	15°
coverings	polyester glossy, coarse matt, PURMAT, PURLAK, PURMAX	coarse matt, TOPMAT, PURMAT, PURLAK, PURMAX
accessories	screws, seals, sealing collars, flashings, touch-up paint	




REN steel roof tiles has been awarded with **GOLDEN MEDAL** at Budma International Poznań Fair 2018

ROOF TILES




OPTIMA roof tile is produced in length adequate to customer's order. Assembly of the sheets takes place in way typical for Pruszyński's roof tiles. OPTIMA is available in all coatings, in 27 basic colours from RAL and RR chart.

OPTIMA

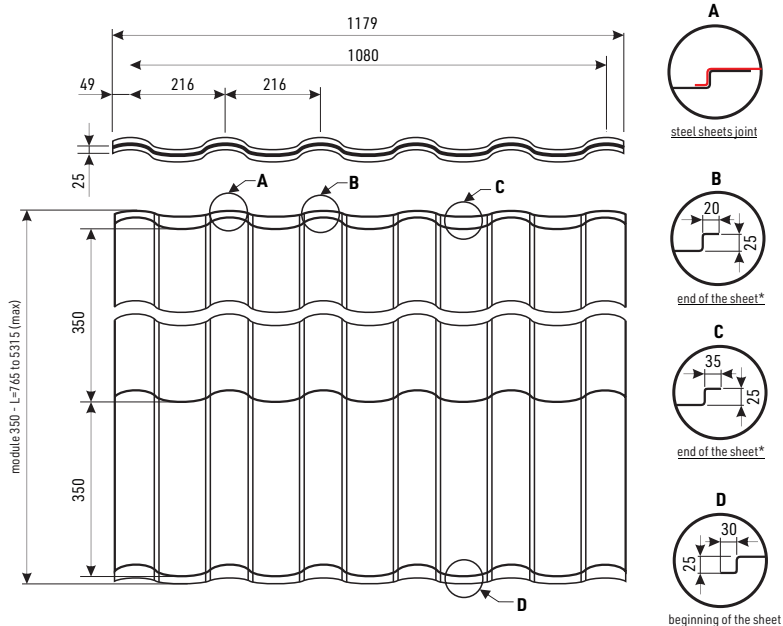

module length	350 mm
profile height	35 mm
fold height	25 mm
total width	~1179 mm
effective width	1080 mm
min. roof slope	9°
coverings	glossy polyester, coarse matt, PURMAT, PURLAK, PURMAX
accessories	screws, seals, sealing collars, flashings, touch-up paint

*To join the sheets along their length, it is necessary to consider folds
– 30 mm in the front and 35 mm in the back. Total of folds in a sheet with full back crease is 65 mm.



ROOF TILES



See our assembly video instruction
of steel roof tiles:
https://www.youtube.com/watch?v=VM5MPDE8_Dg






Steel tile **RUBIN** is one of the most economical roofing materials. Thanks to its light weight (ca. 4.7 kg/1m²) it does not require the use of heavy roof truss structure, which results in decrease in use of wood. The weight of materials is also very important in case of renovation of roof construction.



RUBIN



module length	350 lub 400 mm
profile height	20 mm
fold height	15 lub 20 mm
total width	1206 mm
effective width	1150 mm
min. roof slope	9°
coverings	glossy polyester, coarse matt, PURMAT, PURLAK, PURMAX
accessories	screws, seals, sealing collars, flashings, touch-up paint

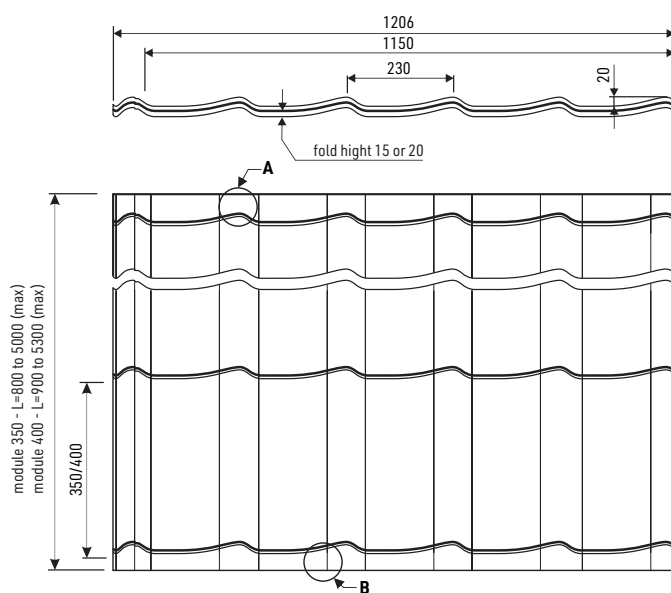

* if the back tab dimension is smaller than 70 mm, the sheet will not have the last fold



1st place in the 5th edition of
„LAUR KLIENTA 2009”
in steel roofing tile category




ROOF TILES



Wide range of colours allows matching the roof with elevation and surroundings. Due to defined length of sheets, the quantity of wasted material is cut down to minimum. Blachy Pruszyński steel tiles are covered with warranty period up to 50 years (depending on the type of coating).

Now SZAFIR roof tile is available also in modular mode !

SZAFIR

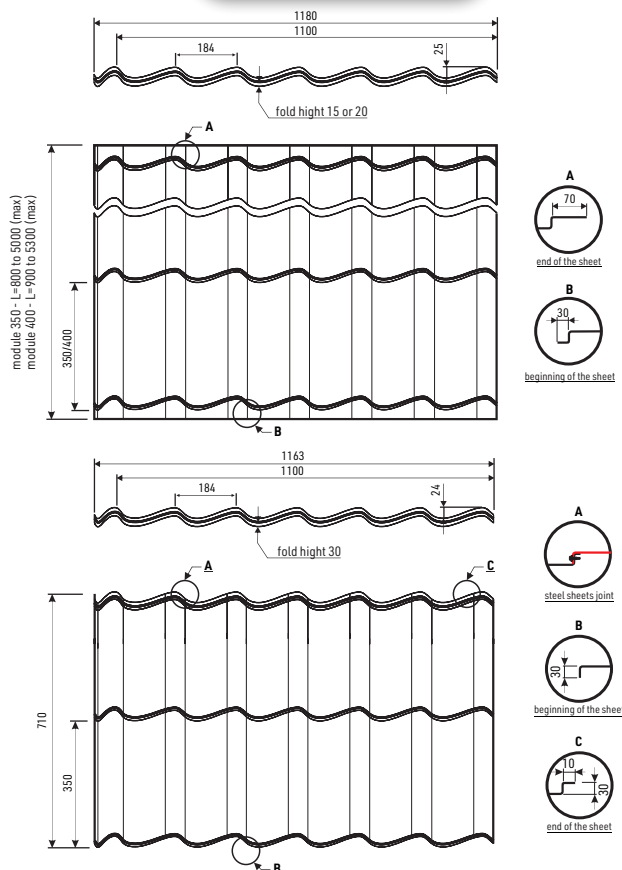

	roof tile	panel roof tile
effective area	-	0,77 m ²
module length		350 mm
profile height		25
fold height	15 lub 20mm	30 mm
total width	1180 mm	1163 mm
effective width	1100 mm	1100 mm
min. roof slope	9°	15°
coverings	polyester glossy, coarse matt, PURMAT, PURLAK, PURMAX	coarse matt, TOPMAT, PURMAT, PURLAK, PURMAX
accessories	screws, seals, sealing collars, flashings, touch-up paint	



SZAFIR steel roofing tiles have been awarded with the 13th edition of **Teraz Polska (Now Poland)** Polish Promotional Emblem



COLORS

POLYESTER COVERINGS

glossy PS 25 µm

RAL 9010 ^{(1) (2) (3)}	RAL 9002 ^{(1) (2)}	RAL 7035 ^{(1) (2)}	RAL 9006 ^{(1) (2) (3)}	RAL 9007 ^{(1) (2)}	RAL 7000 ⁽¹⁾
SNOWY WHITE	WHITE	GREY	SILVER	SILVER METALLIC	GREY
RAL 7024 ⁽¹⁾	RAL 7016 ^{(1) (2)}	RAL 5010 ^{(1) (2)}	RAL 6029 ^{(1) (2)}	RAL 6005 ⁽¹⁾	RAL 1021 ⁽¹⁾
GRAPHITE	ANTHRACITE	BLUE	GREEN	DARK GREEN	YELLOW
RAL 1002 ^{(1) (2)}	RAL 8023 ⁽¹⁾	RAL 8004 ⁽¹⁾	RAL 3016 ^{(1) (2)}	RAL 3005 ⁽¹⁾	RR 028 ⁽¹⁾
SAND	COPPER	BRICK	CORAL	DARK CHERRY	CHERRY
RAL 3011 ⁽²⁾	RAL 8017 ^{(1) (2)}	RR 032 ⁽¹⁾	RAL 9005 ⁽¹⁾		RAL 1015 ⁽¹⁾
LIGHT CHERRY	BROWN	DARK BROWN	BLACK	GOLDEN OAK	CREAM - BEIGE

10/30 Guarantee*
for years

The 25 µm layer of polyester varnish is an efficient protection against the destructive impact of UV radiation. The coating protects the steel against corrosion and ensures colour durability for years. Products with glossy polyester (PS) coating are granted even 30-year warranty.

PMG 35 µm coarse matt

RR 011 ⁽¹⁾	RR 750 ⁽¹⁾	RR 028 ⁽¹⁾	RR 032 ⁽¹⁾	RAL 8017 ⁽¹⁾	RAL 7016 ⁽¹⁾
GREEN	BRICK	CHERRY	DARK BROWN	BROWN	ANTHRACITE
RR 033 ⁽¹⁾					
BLACK	DARK WALNUT				

15/35 Guarantee*
for years

The coarse-grained PMG polyester coating is 35 µm of efficient protection against external factors. Used primarily for cut-to-size steel roof tiles, it creates a modern, matt finish for the building.

TOPMAT

RR 750 ⁽¹⁾	RAL 8017 ⁽¹⁾	RAL 7016 ⁽¹⁾	RR 033 ⁽¹⁾
BRICK	BROWN	ANTHRACITE	BLACK

20/35 Guarantee*
for years

TOPMAT® is a 35 µm thick matt polyester surface. It has 20% higher resistance to discoloration and higher corrosion resistance than glossy polyester coating. It's designed for panel roof tiles.

HYBRID COATINGS

PURMAX

POWŁOKA HYBRYDOWA

RAL 8004 ⁽¹⁾	RAL 8017 ⁽¹⁾	RAL 9005 ⁽¹⁾	RAL 7016 ⁽¹⁾
BRICK	BROWN	BLACK	ANTHRACITE

20/40 Guarantee*
for years

This coating is a combination of 25 µm polyester and 15 µm thick polyurethane. It is characterized by a very high resistance to mechanical damage thanks to innovative methods of hardening varnishes with the use of UV radiation.

POLYURETHANE COVERINGS

PURLAK

RAL 8004 ⁽¹⁾	RR 028 ⁽¹⁾	RAL 8017 ⁽¹⁾	RR 750 ⁽¹⁾	RR 011 ⁽¹⁾	RR 028 ⁽¹⁾
BRICK	CHERRY	BROWN	BRICK	GREEN	CHERRY
RAL 9005 ⁽¹⁾	RAL 7016 ⁽¹⁾		RAL 8017 ⁽¹⁾	RR 033 ⁽¹⁾	RAL 7016 ⁽¹⁾
BLACK	ANTHRACITE		BROWN	BLACK	ANTHRACITE

30/50 Guarantee*
for years

The polyurethane coverings PURLAK (gloss) and PURMAT (matt) are a 50-micron layer which effectively protects the cover against the harmful effects of sunlight. The risk of corrosion has been minimized, so that the coating can be used even in areas with a high degree of environmental aggressiveness.

(1) steel sheet thickness 0.5 mm, (2) steel sheet thickness 0.7 mm, (3) steel sheet thickness 1.0 mm,

Actual colours may vary from displayed or printed images. The shades of the coatings may vary depending on the steel coil from the product is made of.

If the customer requires a specific shade of coating color, please inform the sales person when placing the order.

*The length of the guarantee depends on the type of guarantee (aesthetic or technical). Check the conditions on the website pruszynski.com.pl or ask at the point of sale.