

GTR W FH




SELF-DRILLING SCREWS WITH INTEGRATED FLANGE HEAD FOR FIXING STEEL SHEETS IN CONCRETE OR WOOD SUBSTRATE

Self-tapping screws made of surface-hardened carbon steel, with drilling point for wood, working Hi-Lo thread and hex head with integrated flange head. Additional corrosion protection: gRey.coat coating.



Designed for fixing corrugated steel sheet in concrete and wood substrate. Direct mounting in concrete and wood. Mounting in concrete structure requires preparation of the preliminary hole.

Product designation	Fastener					MTmax	Drill. thick.	Package Separate/Quantity/Collective [pcs]
	D	L	Sw	Bk	Anchoring depth		DC	
	[mm]	[mm]	[mm]	[mm]	[mm]		[mm]	
P159033FHGC3PL	6,4	33	8	15	30	3	0,75	500/1/500
P159041FHGC3PL	6,4	41	8	15	30	11	0,75	500/1/500

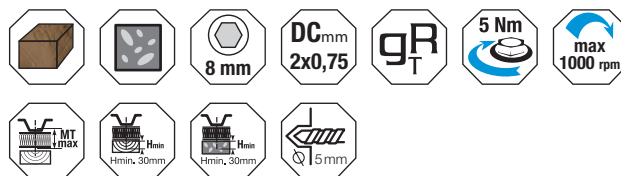

GTR W

SELF-DRILLING SCREWS WITHOUT WASHER FOR FIXING STEEL SHEETS ON CONCRETE SUBSTRATE

Self-tapping surface-hardened carbon steel screw with cutpoint, working Hi-Lo thread and hex head without washer. Additional corrosion protection: gRey.coat coating.



Designed for fixing corrugated steel sheet in concrete substrate. Direct mounting in concrete and wood. Mounting in concrete structure requires preparation of the preliminary hole.

Product designation	Fastener			MTmax	Max drill. thick.	Package Separate/Quantity/Collective [pcs]
	D	L	Sw		DC	
	[mm]	[mm]	[mm]		[mm]	
P159033GC3PL	6,4	33	8	3	0,75	500/4/2000
P159041GC3PL	6,4	41	8	11	0,75	500/1/500
P159057GC3PL	6,4	57	8	27	0,75	500/1/500

